



# GATE-GS

Gate-GSH is automatic swing gate with a glass leaf. Along with standard dimensions, width and height of a glass swing leaf can be enlarged. Automatic gate system includes all the features and functionality as listed below.

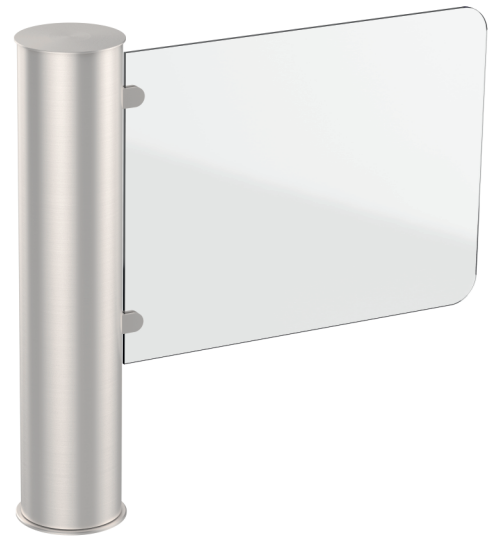

*ELEGANT, LIGHT AND MINIMALISTIC PART OF ACCESS CONTROL SYSTEM*



## Key features:

- Solution for disabled and trolley access;
- Appropriate addition to other TiSO turnstiles (waist-height and full-height);
- Steadfast housing suitable for high traffic areas;
- Can be integrated with any type of access control systems;
- Perfect Fusion of Affordability and High Quality;
- Left hand, right hand and double-sided opening are available;
- Gate housing could be adapted for both indoor and outdoor installations;
- Compatible with Ramped Base Mobile Platform (TiSO Frame-M);
- Extensive Array of Accessories for Customization;
- Wired Remote Control Included in Standard Kit;
- Fail-safe;
- Low Power Consumption.



## Technical Specifications:


Model	Gate-GSH 650	Gate-GSH 900
Width, mm	815	1065
Length, mm		225
Height, mm		1000
Passage width, mm	650	900
Mechanism	Servo-driven	
Blocking system	Single electromagnetic brake	
Operation mode	CW (100°) and CCW (100°)	
Emergency mode	Free exit/entry (gate is opening automatically)	
Power fail	Fail safe (gate could be opened manually — standard)	
MCBF, cycles	5 000 000	

## Electrical Specifications:

Maximum power consumption, W	55
Voltage	From the AC (100-240)V, 50/60Hz; from a DC source 12 V

## Finishing

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316; Polished SS AISI 304; Polished SS AISI 316; Powder coated RAL

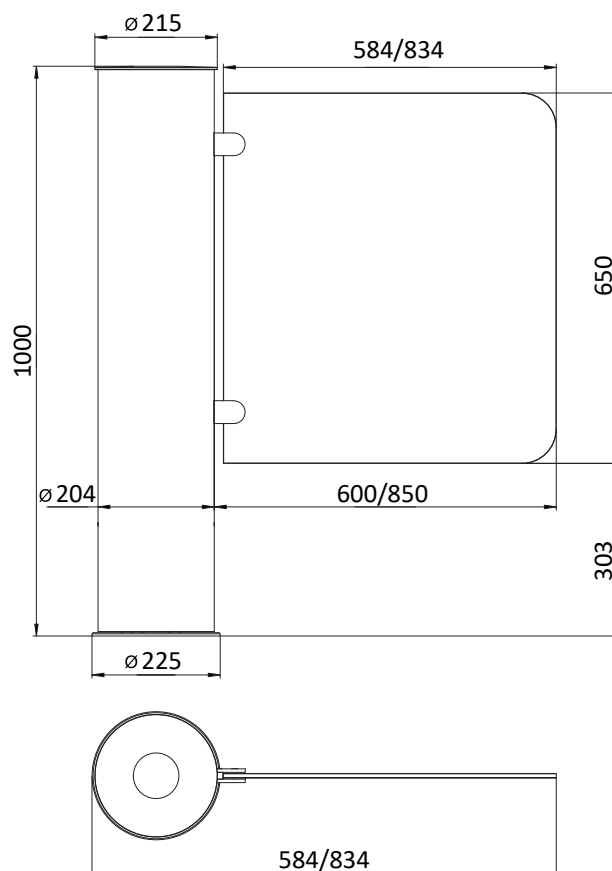

*Specifications are subject to change without prior notice.*

